



OTHER VALVES - SCREWDOWN VALVE

Specifications

WRE Screw Down Valves are extensively used in mining, agriculture and industry.

Since the original design was established many years ago to meet the needs of the Mining Industry, numerous improvements have been introduced.


The angular design and generous seat dimensions ensure a free flow with a minimum pressure drop whether used for air, water or other free flowing media.

Having been designed to stand up to rough treatment and abuse these valves are practically indestructible.

Maximum working pressure 56 Bar

Materials Of Construction

Body, cap and handle	Ductile Iron
Spindle	Brass
Seals (Gland rubber)	NBR
Valve closer	A combination of mild steel and polyurethane
Inlets	25mm (1") and 50mm (2") BSP
Coating	Unpainted, unless requested

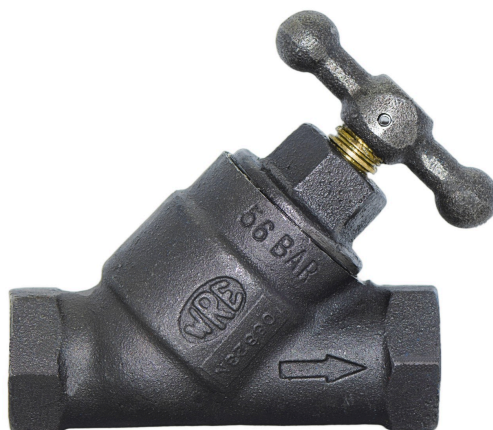

Pipe Thread B.S.P	Description	Item Number
1" Female	25mm Mk III	1095903
1" Female	25mm Standard	238803
1" Female	50mm (2") Shouldered Inlet X 1" B.S.P. Outlet	273403
2" Female	50mm Standard	318303
-	50mm Shouldered	262103