




OTHER VALVES - GATE VALVE (Rising spindle flanged)

Specifications
Rising spindle
Packing replaceable under pressure
Flange Drilling to BS4504; BSEN1092; SANS1123 and BS10
Hand wheel operated
Face to face dimension to SABS 665
Low torque opening and closing
Maximum working pressure is 16 Bar
Sizes DN50 - 300

Materials of Construction	
Body, Bonnet, Handwheel, York, Packing Gland	Ductile Iron
Pin, Stem, Bonnet Bolts, Packing Sleeve, Handwheel Screw, York Bolts	Stainless Steel
Wedge	Ductile Iron core fully vulcanized with EPDM or NBR
Wedge nut	Brass
Bonnet Gasket	EPDM
Stem nut and gasket	Nylon
Gland nut, Washer, York nut, York Washer	Carbon Steel
Packing	Teflon
Coating	Fusion Bonded Epoxy

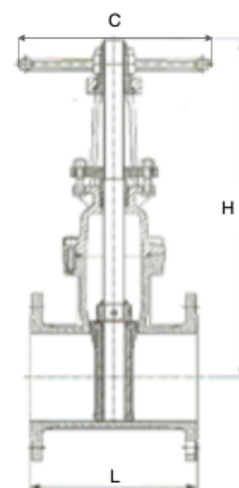

Size (mm)	L (mm)	H (mm)	C (mm)	Item Number
50	178	312	184	FT500040
80	203	380	254	FT500041
100	229	410	254	FT500042
125	254	530	305	FT500043
150	267	562	305	FT500044
200	292	730	356	FT500045
250	330	865	445	FT500046
300	356	1 020	445	FT500047