




COUPLINGS - EVERTITE HOSE CONNECTION

Specifications
Evertite fittings are synonymous with shaft sinking
They can withstand the most abrasive conditions
They are used to couple machines to hoses
Positive lock system
Sizes are 25mm, 50mm and 80mm
Complies to SANS1086 pressure requirements

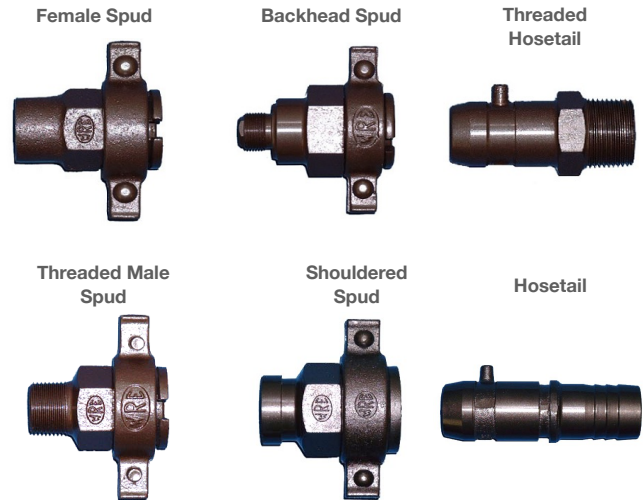

Type	Hose Size (mm)	Pipe Thread B.S.P.	Description	Item Number	
25mm	-	1/2" Male	Spud with gasket	1031	
	-	3/4" Male	Spud with gasket	1030	
	-	1" Male	Spud with gasket	1028	
	-	1" N.P.T Male	Spud with gasket	11307	
	-	3/8" Female	Spud with gasket	1057	
	-	1/2" Female	Spud with gasket	1056	
	-	3/4" Female	Spud with gasket	1029	
	-	1" Female	Spud with gasket	1055	
	-	3/4" Male	Backhead Spud with Gasket and Gland nipple	1356	
	-	-	Gland Nipple	231	
	10	-	Hosetail	297	
	12,5	-	Hosetail	12	
	20	-	Hosetail	10	
	25	-	Hosetail	11	
	-	-	3/4" Male	Threaded Hosetail	5947
	-	-	1" Male	Threaded Hosetail	129801
-	-	-	Gasket	133	
50mm	-	2" Male	Spud with gasket	2051	
	-	1 1/2" Male	Spud with gasket	10744	
	-	2" Female	Spud with gasket	2170	
	50	-	Shouldered Spud with Gasket	10274	
	50	-	Hosetail	1043	
	-	-	Gasket	206	
80mm	-	3" Male	Spud with gasket	2418	
	80	-	Hosetail	1870	
	-	-	Gasket	7452	